


Runtime: SCL500RM1UC

APC Smart-UPS Lithium-Ion, Short depth 500VA, 120V with SmartConnect Port
Smart-UPS

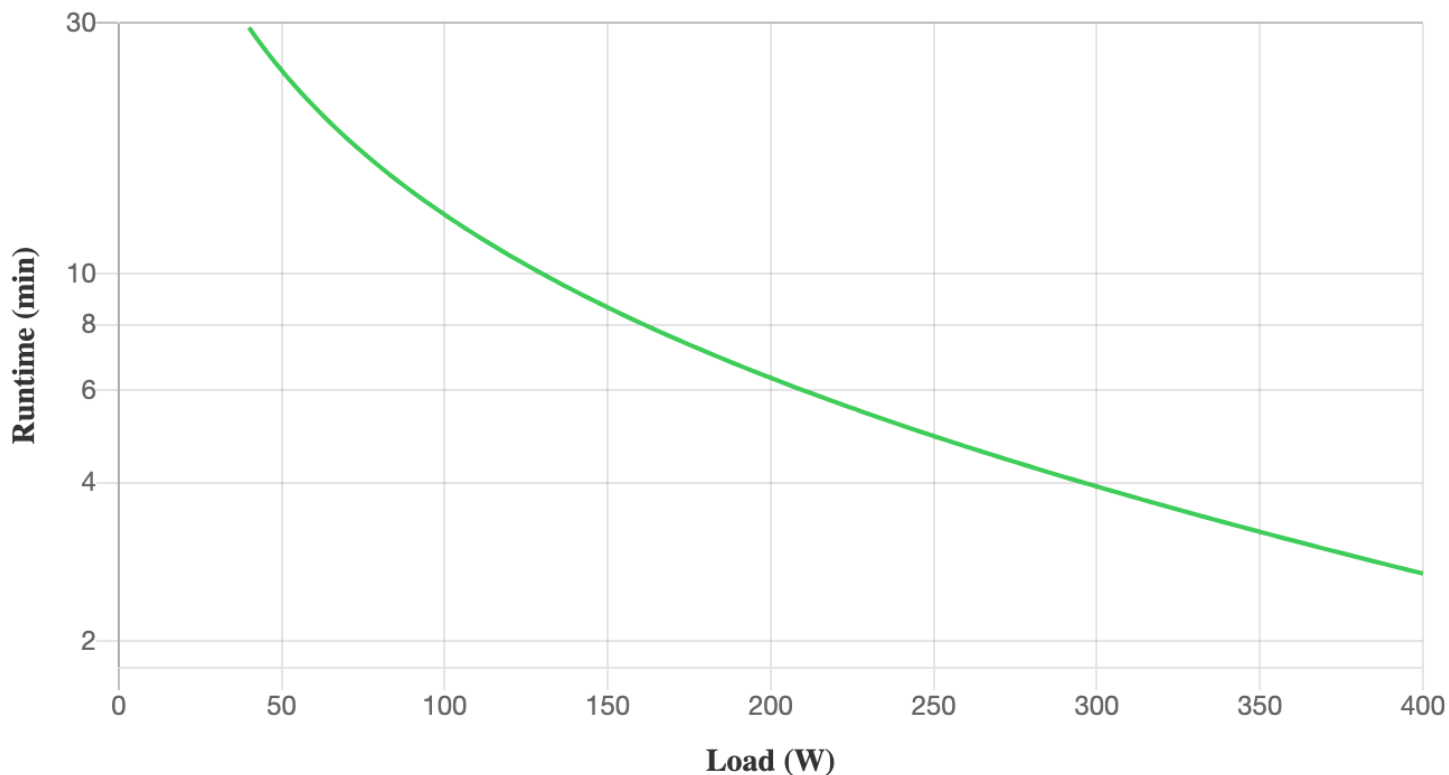


Curve fit to measured runtime data. All measurements taken with new, fully charged batteries, at typical environmental conditions, with no electrical input and balanced resistive load (PF = 1.0) output.

Load / Runtime	40 W	50 W	100 W	150 W	200 W	250 W	300 W	350 W	400 W
SCL500RM1UC	29 min 25 sec	24 min 23 sec	12 min 57 sec	8 min 37 sec	6 min 20 sec	4 min 54 sec	3 min 56 sec	3 min 13 sec	2 min 41 sec

<https://www.apc.com/us/en/products-runtime-graph/SCL500RM1UC/APC-Smart-UPS-Lithium-Ion-Short-Depth-500VA-120V-With-SmartConnect-Port>

Runtime: SMTL750RM2UC

APC Smart-UPS, Lithium-Ion, Short Depth 750VA, 120V with SmartConnect Port
Smart-UPS

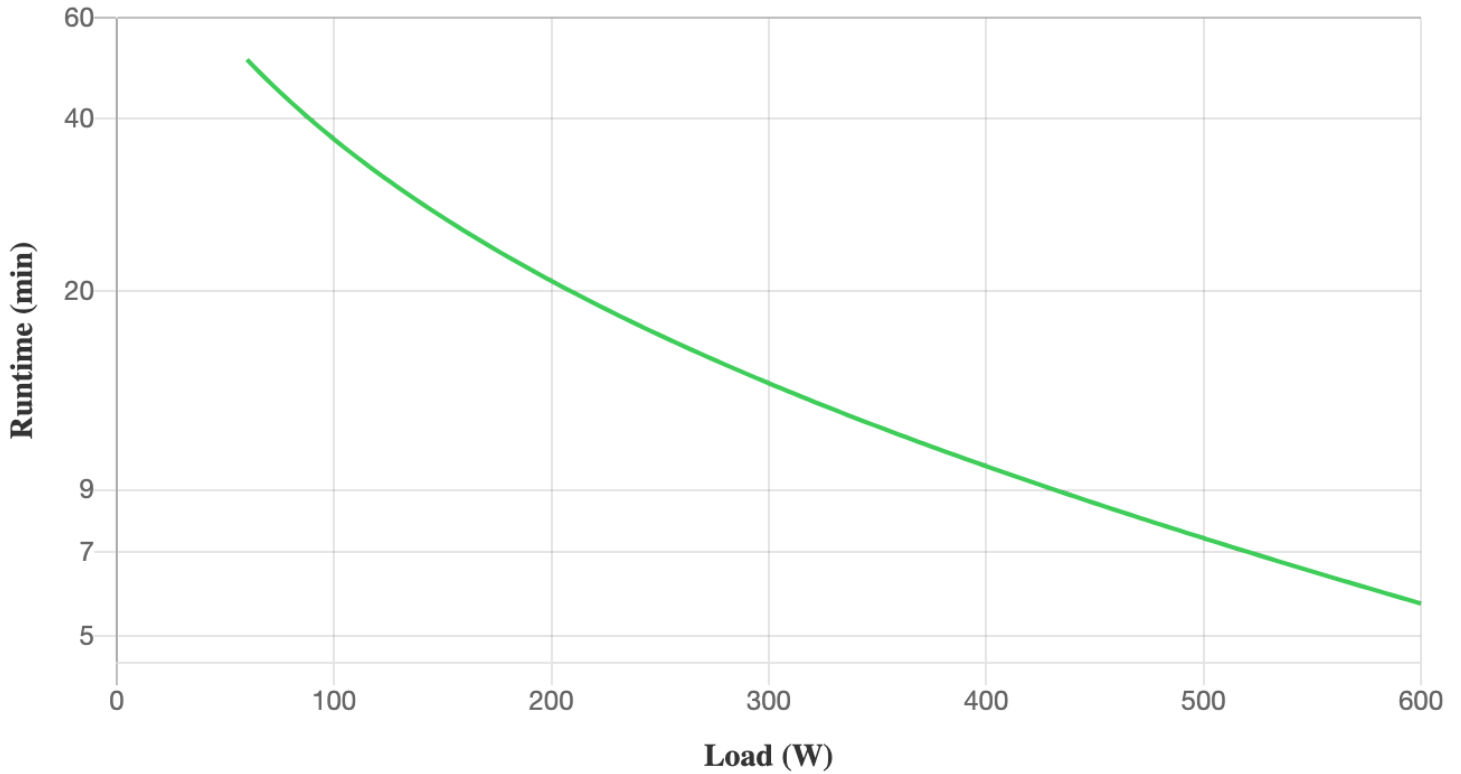


Curve fit to measured runtime data. All measurements taken with new, fully charged batteries, at typical environmental conditions, with no electrical input and balanced resistive load (PF = 1.0) output.

Load / Runtime	60 W	100 W	150 W	200 W	250 W	300 W	350 W	400 W	450 W	500 W	550 W	600 W
SMTL750RM2UC	50 min	36 min	26 min 56 sec	20 min 51 sec	16 min 45 sec	13 min 49 sec	11 min 36 sec	9 min 53 sec	8 min 31 sec	7 min 24 sec	6 min 28 sec	5 min 41 sec

<https://www.apc.com/us/en/products-runtime-graph/SMTL750RM2UC/APC-Smart-UPS-Lithium-Ion-Short-Depth-750VA-120V-With-SmartConnect-Port>

Runtime: SMTL1000RM2UC

APC Smart-UPS, Lithium-Ion, Short Depth 1000VA, 120V with SmartConnect Port
Smart-UPS

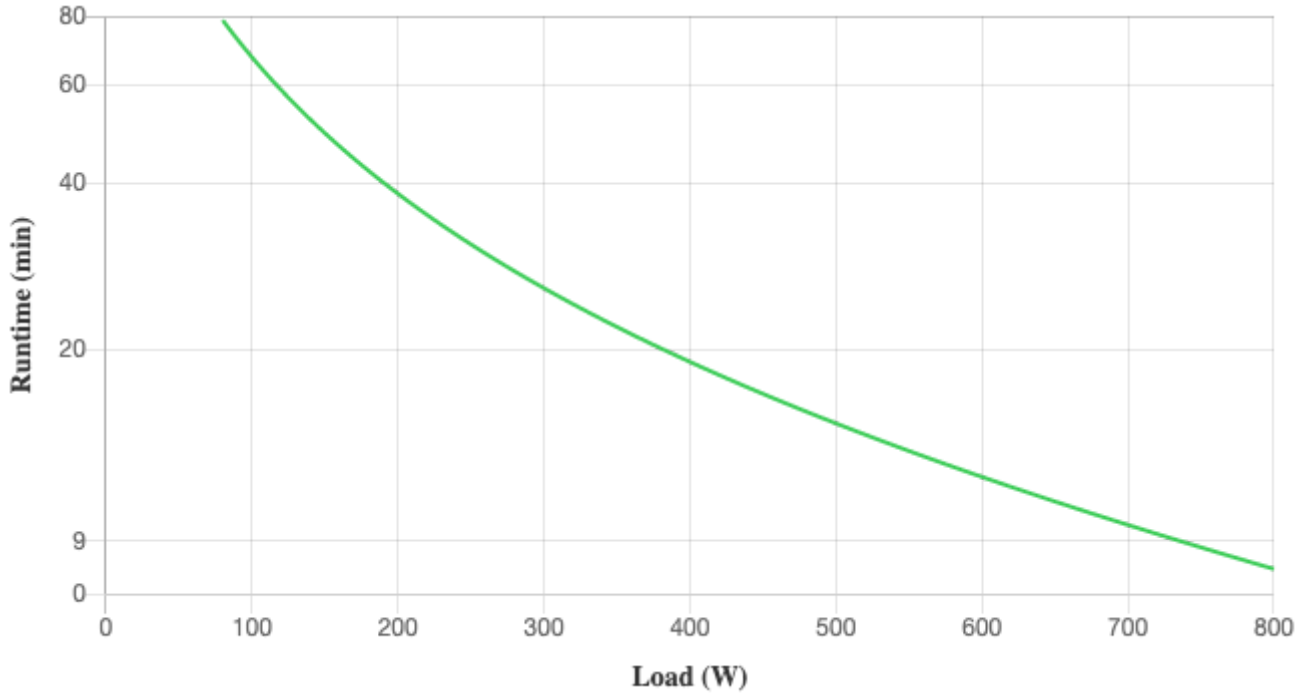


Curve fit to measured runtime data. All measurements taken with new, fully charged batteries, at typical environmental conditions, with no electrical input and balanced resistive load (PF = 1.0) output.

Load / Runtime	80 W	100 W	200 W	300 W	400 W	500 W	600 W	700 W	800 W
SMTL1000RM2UC	1 h 18 min	1 h 7 min	38 min	25 min 49 sec	18 min 59 sec	14 min 42 sec	11 min 46 sec	9 min 38 sec	8 min 1 sec

<https://www.apc.com/us/en/products-runtime-graph/SMTL1000RM2UC/APC-Smart-UPS-Lithium-Ion-Short-Depth-1000VA-120V-With-SmartConnect-Port>

Runtime: SMTL1500RM3UC

APC Smart-UPS, Lithium-Ion, Short Depth 1500VA, 120V with SmartConnect Port
Smart-UPS

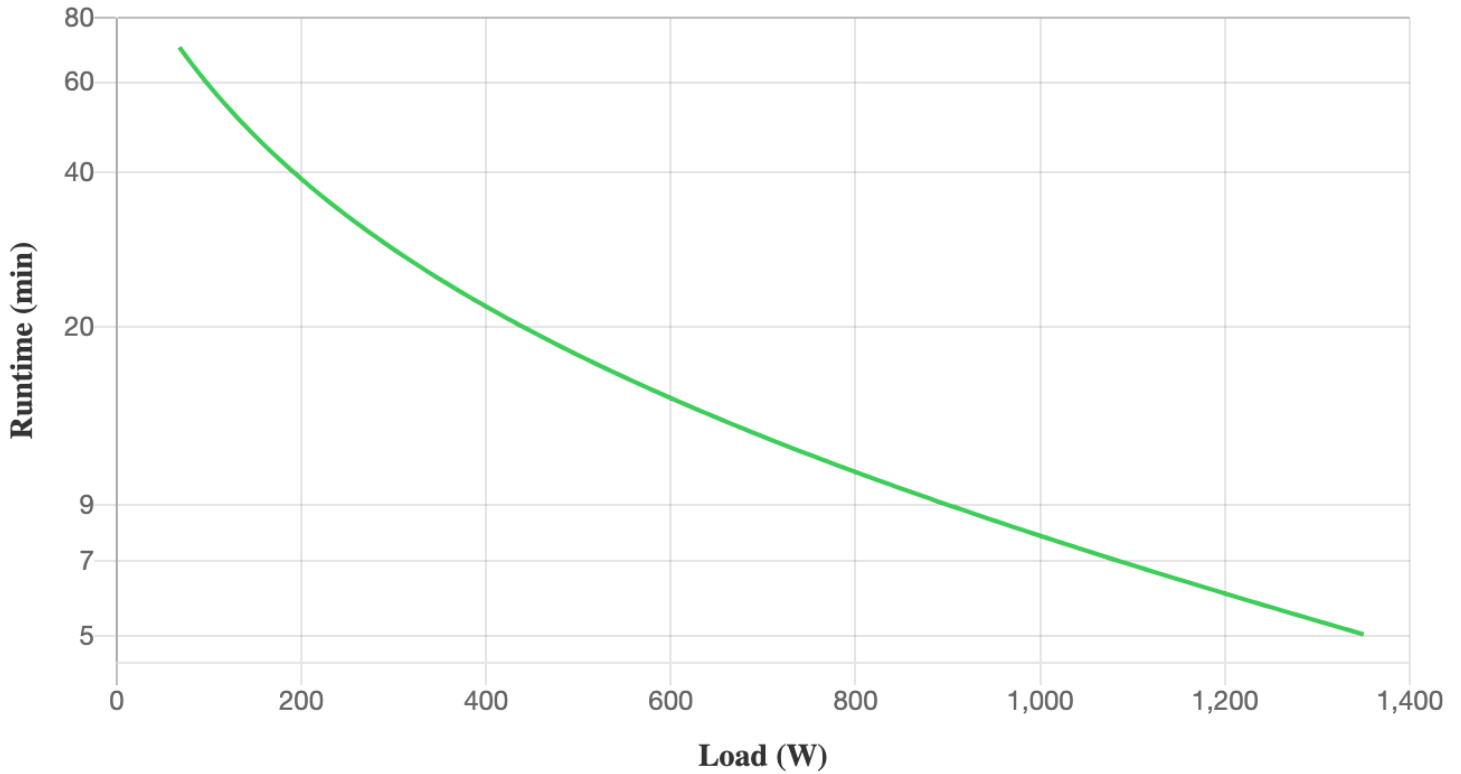


Curve fit to measured runtime data. All measurements taken with new, fully charged batteries, at typical environmental conditions, with no electrical input and balanced resistive load (PF = 1.0) output.

Load / Runtime	68 W	100 W	200 W	300 W	400 W	500 W	600 W	700 W	800 W	900 W	1,000 W	1,100 W	1,200 W	1,300 W	1,350 W
SMTL1500RM3UC	1 h 10 min	59 min 38 min	28 min 21 sec	21 min 55 sec	17 min 37 sec	14 min 32 sec	12 min 13 sec	10 min 26 sec	9 min	7 min 50 sec	6 min 52 sec	6 min 3 sec	5 min 21 sec	5 min 2 sec	5 min 2 sec

<https://www.apc.com/us/en/products-runtime-graph/SMTL1500RM3UC/APC-Smart-UPS-Lithium-Ion-Short-Depth-1500VA-120V-With-SmartConnect-Port>

Runtime: SMTL2200RM2UC

APC Smart-UPS, Lithium-Ion, 2200VA, 120V with SmartConnect Port
Smart-UPS

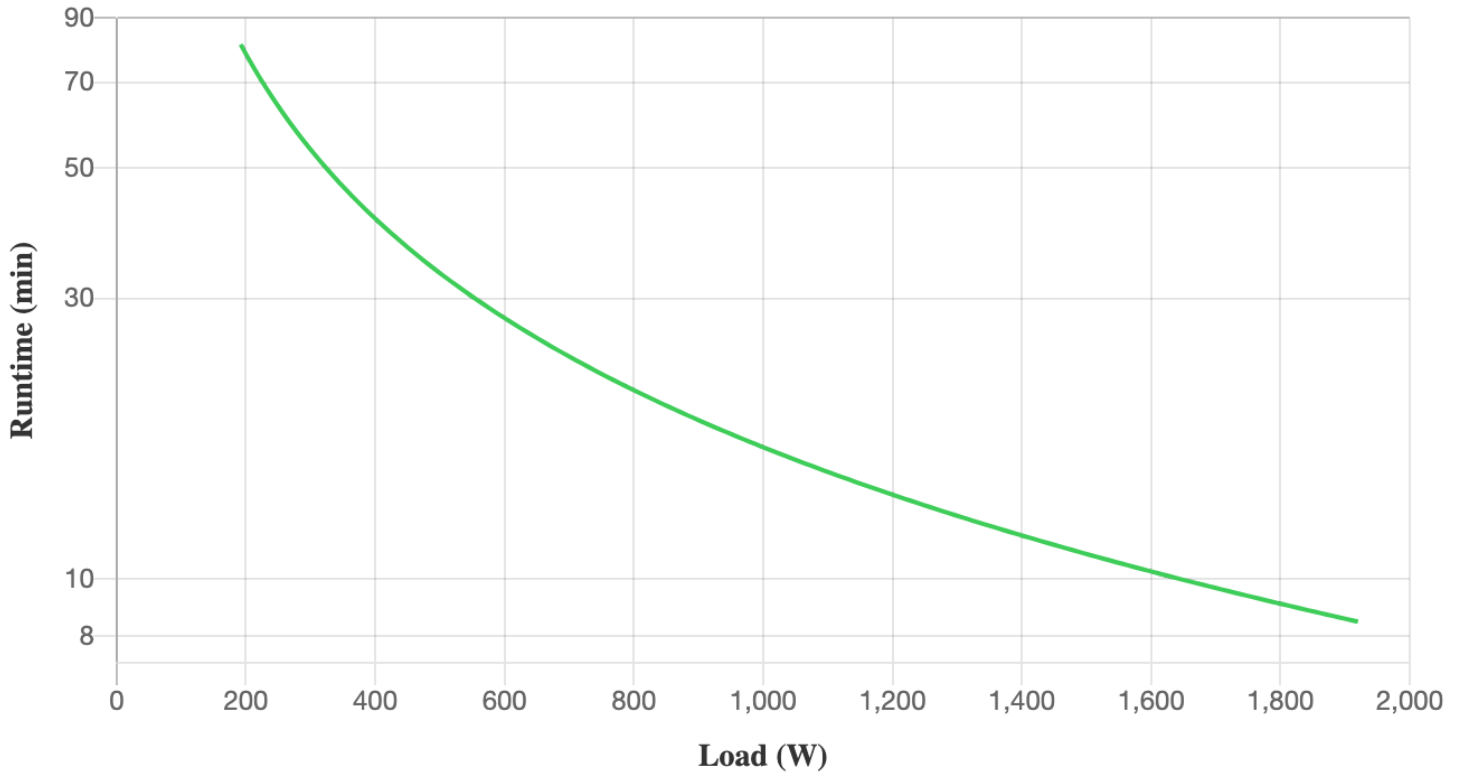


Curve fit to measured runtime data. All measurements taken with new, fully charged batteries, at typical environmental conditions, with no electrical input and balanced resistive load (PF = 1.0) output.

Load / Runtime	192 W	200 W	400 W	600 W	800 W	1,000 W	1,200 W	1,400 W	1,600 W	1,800 W	1,920 W
SMTL2200RM2UC	1 h 21 min	1 h 18 min	41 min	27 min 47 sec	20 min 57 sec	16 min 45 sec	13 min 55 sec	11 min 51 sec	10 min 18 sec	9 min 4 sec	8 min 27 sec

<https://www.apc.com/us/en/products-runtime-graph/SMTL2200RM2UC/APC-Smart-UPS-Lithium-Ion-2200VA-120V-With-SmartConnect-Port>

Runtime: SMTL3000RM2UC

APC Smart-UPS, Lithium-Ion, 3000VA, 120V with SmartConnect Port
Smart-UPS

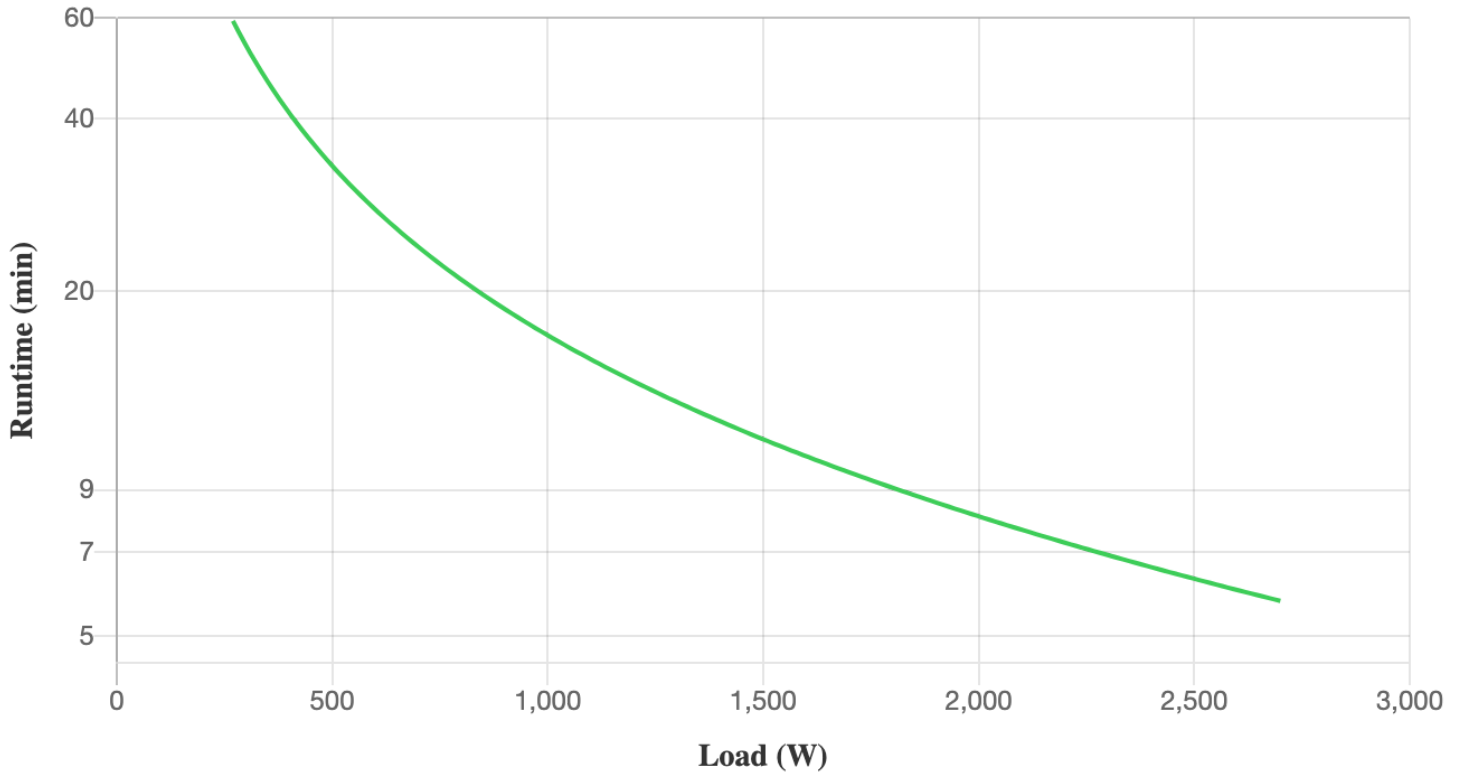

Curve fit to measured runtime data. All measurements taken with new, fully charged batteries, at typical environmental conditions, with no electrical input and balanced resistive load (PF = 1.0) output.

Load / Runtime	270 W	500 W	1,000 W	1,500 W	2,000 W	2,500 W	2,700 W
SMTL3000RM2UC	59 min	33 min	16 min 45 sec	11 min 1 sec	8 min 5 sec	6 min 17 sec	5 min 45 sec

<https://www.apc.com/us/en/products-runtime-graph/SMTL3000RM2UC/APC-Smart-UPS-Lithium-Ion-3000VA-120V-With-SmartConnect-Port>